



DGT EBoard Firmware Loader

- Download the latest firmware file(s) from <http://digitalgametechnology.com/site/index.php/Bluetooth-Board/View-category.html> , choose "Save" and remember the location on your local disc.
- Connect your board with the **USB cable** to your computer, do not use the Bluetooth connection.
- Check what COM port number is assigned to the USB connection of your e-board by using the DGT BoardTester and use the "Connect" tab.

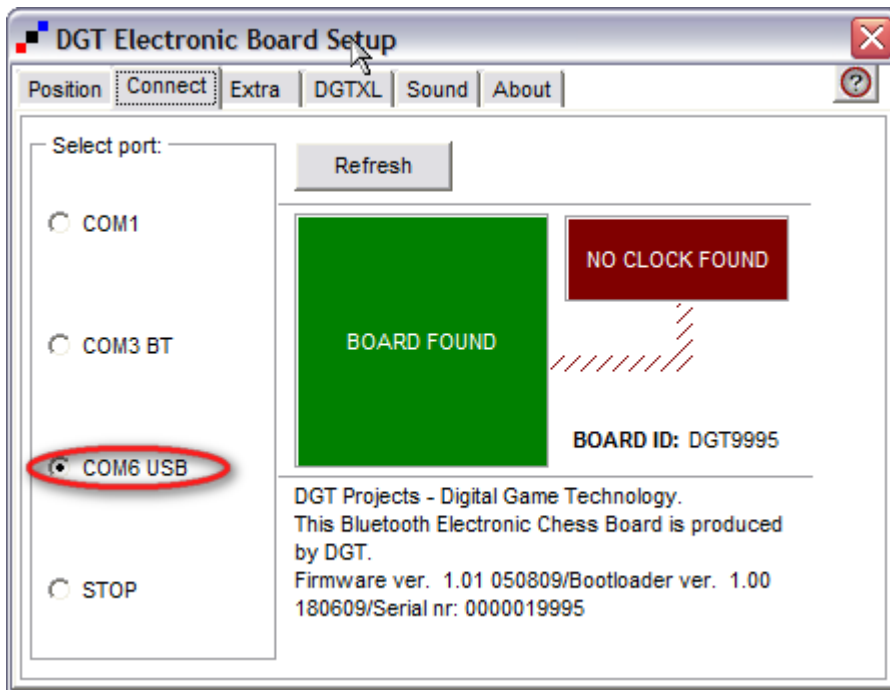

Close the BoardTester and start the Firmware Loader.

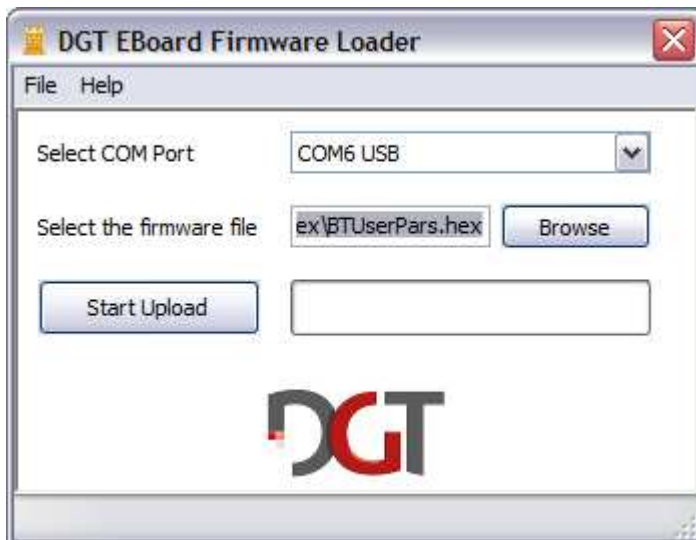

Choose the correct USB COM port and browse to the file with the ".hex" extension then click the "Start Upload" button. The "hex" files may have names like "BTUserPars....hex or main.....hex. The will be



represented by the symbol in case you have switched off the visibility of file extensions.

Be sure that all programs that use the board such as BoardTester are closed. You will get an error message "Can't open Port" if the port is used by another application.

Your USB connection will be switched off and on at the start and at the end of the upload sequence. Please wait until the connection is restored before starting an application that uses the board. By default Windows will play a sound when a USB device is connected and disconnected.